

REFRIGERATORS AND FREEZERS



Model	Doors
RBM1	1 (REFRIG)
RMB2	2 (REFRIG)
RBM3	3 (FREEZER)
FBM1	1 (FREEZER)
FMB2	2 (FREEZER)
FMB3	3 (FREEZER)

Energy Star 5.0 Approved

Energy Star 5.0 Approved

STANDARD FEATURES

- Solid state thermostat with digital display
- Stainless steel front and sides
- LED interior lights
- 3 heavy duty baked epoxy racks
- Self closing doors remain open past 90°
- Non twist solid mullions on 2 & 3 door units
- Environmentally friendly R290
- EZ slide out condenser
- Full length integrated door handle
- Whisper quiet
- Solid construction
- Holds sheet pans front to back
- High efficiency polyurethane insulation
- Zero clearance sides and 1" back
- ES- Energy Star approval


*Not suitable for installation in a non-commercial or residential applications.

Items	Description	Items	Description
Front, top & sides	430 Stainless steel	Temperature control	Solid state thermostat/Digital display
Doors	Stainless steel / ABS liner	Approvals	ETL Listed
External back	Aluminum	Refrigerating system	Capillary tube
Cabinet interior	Powder coated aluminum	Refrigerant	R290
Interior floor	Stainless steel	Temperature range	(CR) 34-38F; (CF) -1° to -7°F
Insulation	Polyurethane (CFC free)	Evaporator	Powder coated aluminum/copper
Shelves	Heavy duty, PVC coating	Condensing unit	Bottom mounted


CONFORMS TO NSF/ANSI STD 7



SIDE VIEW-ALL MODELS

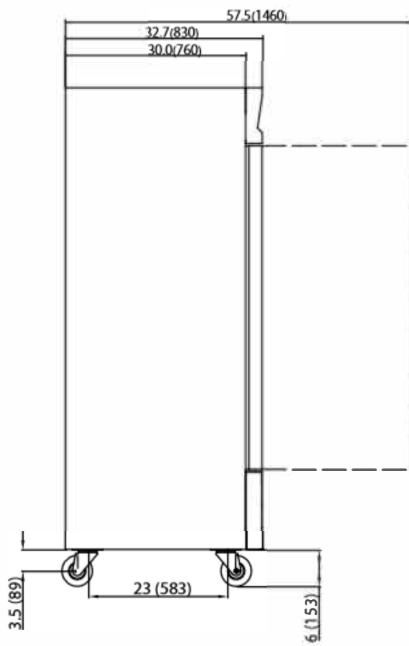

RBM1 // FBM1

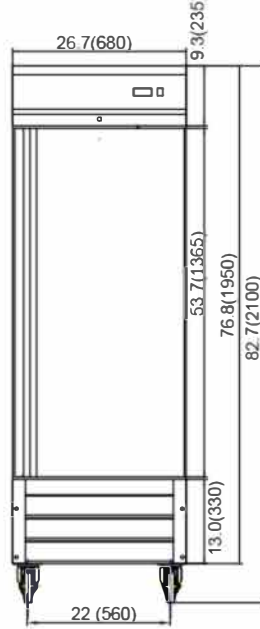


PLUG CONFIG




L14-20P

Y-X: 208V-230V/60Hz
W-Y: 115V/60Hz

RBM2 // FBM2

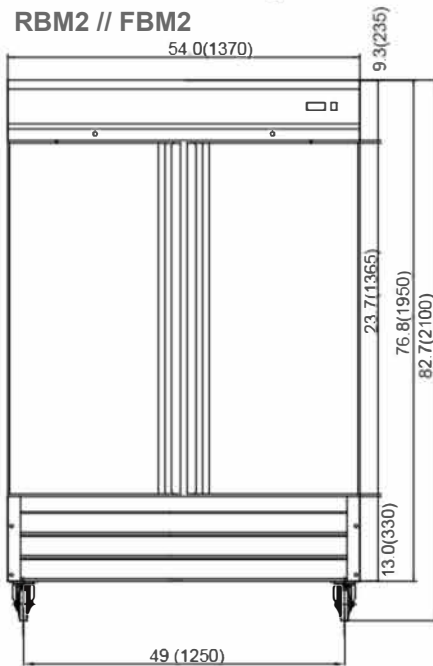

RBM3 // FBM3

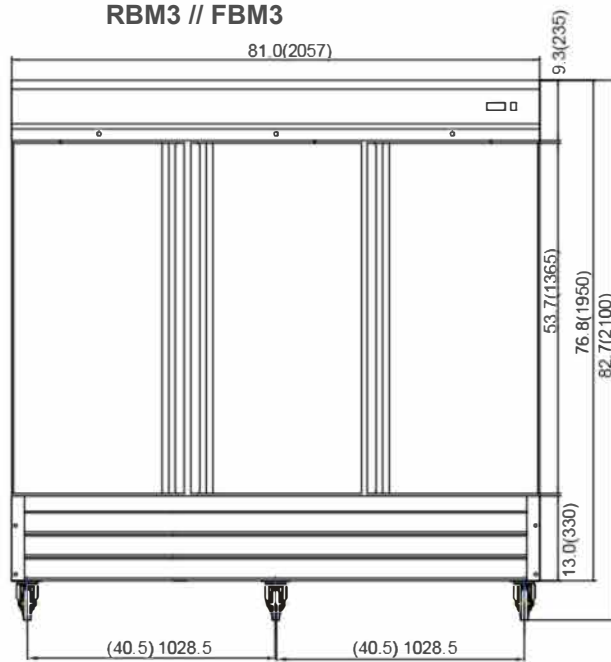

Model	Doors	Shelves	Cabinet Dim (inches)			HP	Voltage	Amps	NEMA Plug	Cord Length	Crated Weight
			L	D	H						
RBM1	1	3	27	33.7	82.7	1/5	115/60/1	3.0	5-15P	10	350
RBM2	2	6	54	33.7	82.7	1/4	115/60/1	4.5	5-15P	10	518
RBM3	3	9	81	33.7	82.7	1/2	115/60/1	7.0	5-15P	10	669
FBM1	1	3	27	33.7	82.7	1/2	115/60/1	8.0	5-15P	10	364
FBM2	2	6	54	33.7	82.7	1	115/60/1	8.0	5-15P	10	568
FBM3	3	9	81	33.7	82.7	1 1/4	115/240/1	9.0	L14-20P	10	776